


**SMB**



**Features**

- Low reverse leakage
- Glass passivated junction
- High forward surge current capability
- High efficiency operation
- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0

**Mechanical Data**

- CASE: SMBJ(DO-214AA) Molded Plastic
- Polarity: Color band denotes cathode end
- Mounting position: ANY
- Weight: 0.0035 ounces, 0.098 gram

**Maximum Ratings & Electrical Characteristics**

(Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.)

Parameter	SYMBOLS	S3MB	UNITS
	MARKING	S3M	
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	1000	V
Maximum RMS voltage	V <sub>RMS</sub>	700	V
Maximum DC blocking voltage	V <sub>DC</sub>	1000	V
Maximum average forward rectified current at T <sub>L</sub> =100 C	I <sub>(AV)</sub>	3.0	A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I <sub>FSM</sub>	100.0	A
Maximum instantaneous forward voltage at 3.0A	V <sub>F</sub>	1.10	V
Maximum DC reverse current T <sub>A</sub> =25 C at rated DC blocking voltage T <sub>A</sub> =125 C	I <sub>R</sub>	5.0 500	u A
Typical junction capacitance (Note1)	C <sub>J</sub>	40.0	pF
Typical thermal resistance	R <sub>qJA</sub>	80.0	C/W
Operating junction and storage temperature range	T <sub>J</sub> , T <sub>STG</sub>	-55 to +150	C

Note:1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

**Summary of Packing Options**

Package	Packing Description	Packing Quantity	Industry Standard
SMB	Tape/Reel, 13" reel	3000	EIA-481-1

## Ratings and Characteristic Curves

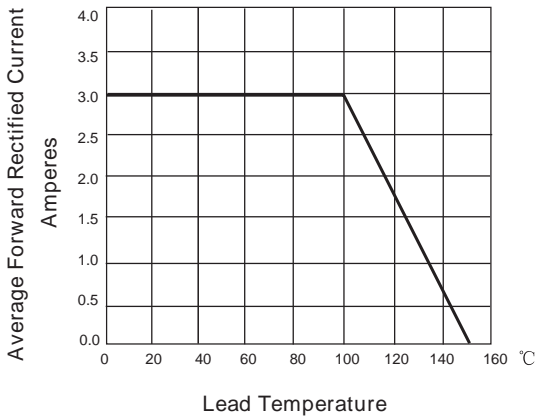


FIG. 1- DERATING CURVE OUTPUT RECTIFIED CURRENT

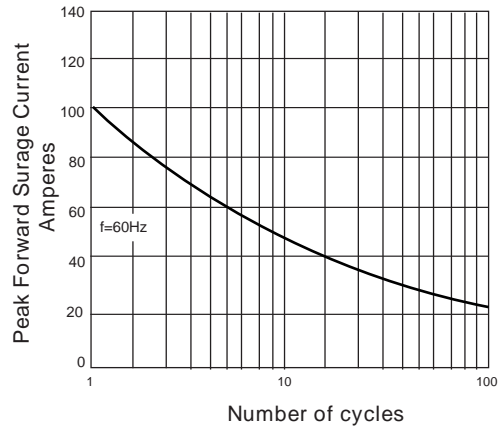


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

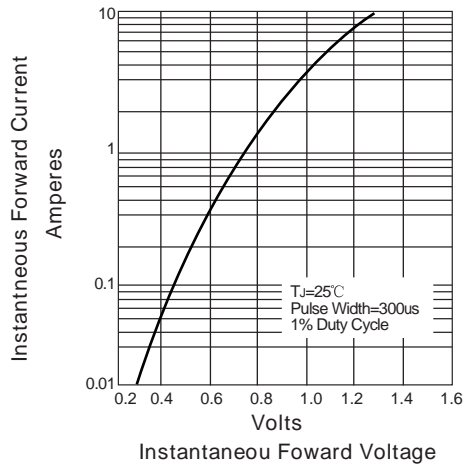


FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS

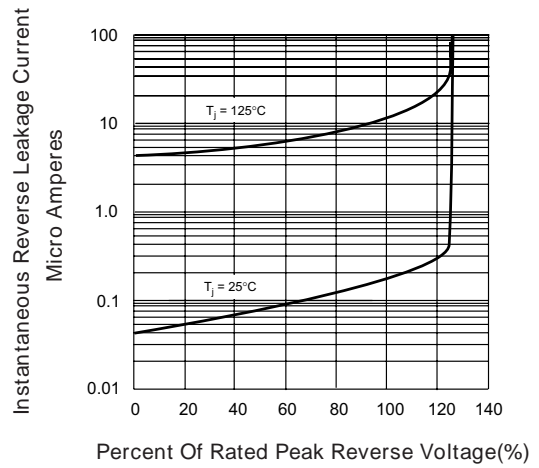


FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS

## Package Outline Dimensions: SMB(DO-214AA)

Dim	Millimeters		Inches	
	Min	Max	Min	Max
L	4.4	4.6	0.173	0.181
D	3.5	3.7	0.138	0.146
D1	1.9	2.1	0.075	0.083
T	5.1	5.48	0.201	0.216
T1	1.0	1.6	0.039	0.063
d	-	0.2	-	0.008
H	2.2	2.45	0.087	0.096
H1	2.15	2.35	0.085	0.093