




## SOD-323

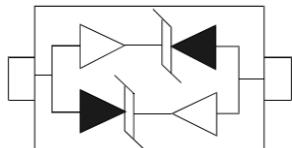

## Features

240Watts peak pulse power( $t_p=8/20\mu s$ )

Low clamping voltage

Low leakage current

Glass passivated junction

Low capacitance

IEC 61000-4-2 ±30KV contact ± 30KV air

Halogen free and RoHS compliant


## Mechanical Data

CASE: SOD-323 Molded Plastic

Molding compound flammability rating: UL 94V-0

Mounting Position: Any

## Making Code & Ordering information

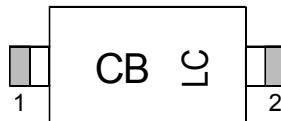

Ordercode	Package	Base qty	Deliverymode
PSD3L24CF	SOD323	3000	Tape and reel

## Maximum Ratings & Thermal Characteristics

(Ratings at 25°C ambient temperature unless otherwise specified.)

Rating	Symbol	Value	Units
Peak Pulse Power ( $t_p = 8/20\mu s$ )	$P_{PP}$	240	Watts
Peak Pulse Current ( $t_p = 8/20\mu s$ ) (note1)	$I_{pp}$	4	A
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	$V_{ESD}$	30 30	kV
Lead Soldering Temperature	$T_L$	260(10seconds)	°C
Junction Temperature	$T_J$	-55 to + 150	°C
Storage Temperature	$T_{stg}$	-55 to + 150	°C

## Electrical Characteristics


(Ratings at 25°C ambient temperature unless otherwise specified).

Parameter	Symbol	Conditions	Min	Typical	Max	Units
Reverse Stand-Off Voltage	$V_{RWM}$				24.0	V
Reverse Breakdown Voltage	$V_{BR}$	$I_T=1mA$	26.7			V
Reverse Leakage Current	$I_R$	$V_{RWM}=24V, T=25^\circ C$			1	uA
Clamping Voltage	$V_C$	$I_{PP}=4A, t_p=8/20\mu s$		60		V
Junction Capacitance	$C_j$	$V_R = 0V, f = 1MHz$		1.0	1.5	pF




## Ratings and Characteristic Curves


(Ratings at 25°C ambient temperature unless otherwise specified).

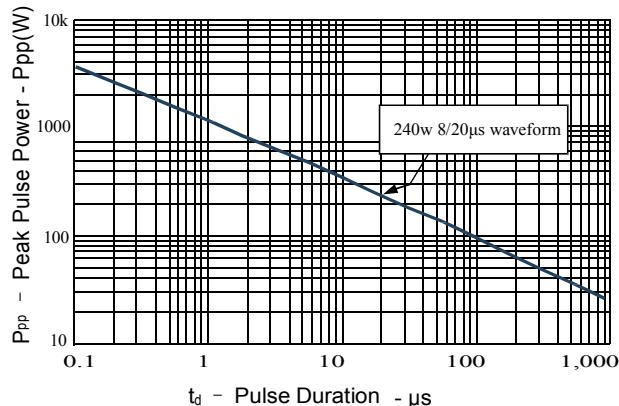


**Figure 1: Peak Pulse Power vs. Pulse Time**

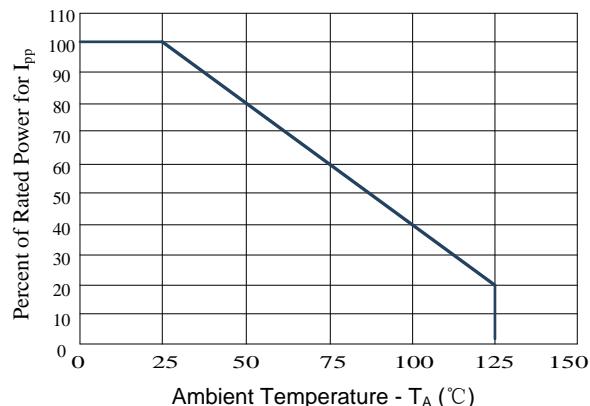

**Figure 2: Power Derating Curve**

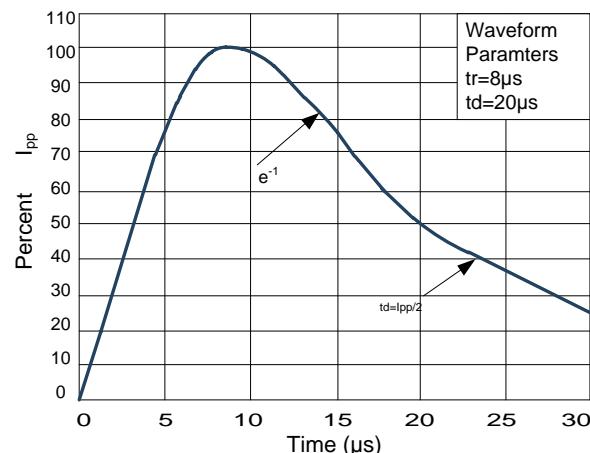


**Figure 3: Pulse Waveform**

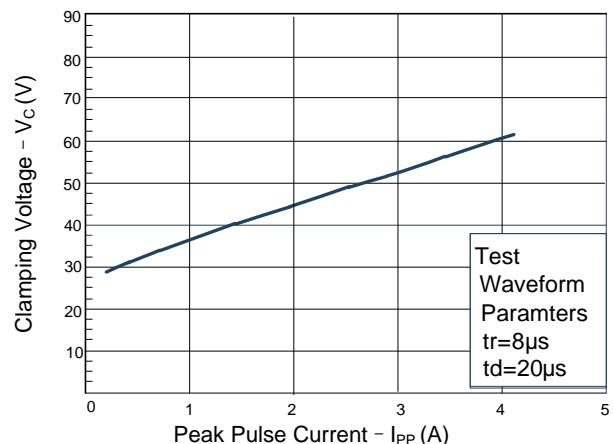

**Figure 4: Clamping Voltage vs.Ipp**

## Package Outline Dimensions: SOD-323

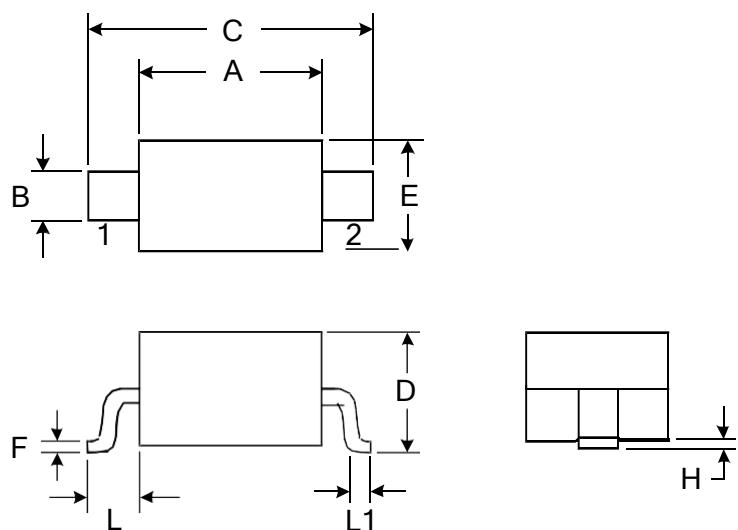

DIMENSIONS				
SYMBOL	MILLIMETER		INCHES	
	MIN	MAX	MIN	MAX
A	1.600	1.800	0.063	0.071
B	0.250	0.350	0.010	0.014
C	2.500	2.700	0.098	0.106
D		1.000		0.039
E	1.200	1.400	0.047	0.055
F	0.080	0.150	0.003	0.006
L	0.475 REF		0.019REF	
L1	0.250	0.400	0.010	0.016
H	0.000	0.100	0.000	0.004